



Specifications

Signage-friendly Design

- Slim bezel for tiled application
- All metal/aluminum construction
- Industrial-grade, superior reliability
- Proofing of image retention
- Fanless design
- Long life power board design
- VESA mounting compliance with carrying handles

PC-Based multi-panel management

- Display Wall support
- Full function display controls
- Scheduling Function providing flexibility of display management
- Real time diagnostic detecting, ambient light luminance, total turn-on time, voltage & temperature

Accessory



- Remote control with batteries
- Quick start guide
- Power cable
- VGA cable

Optional Accessories

- Stand
- Internal speaker
- User manual CD

Display	Type	42.02 inches color TFT LCD
	Pixel Pitch	0.4845 mm
	Resolution	1920 x 1080 (pixels)
	Contrast Ratio	3500:1 (typ)
	Viewing Angles	178° horizontal, 178° vertical
	Response Time	8ms (typ)
	Brightness	700 (typ) /550(min.) cd/m2
	Light Source	Long life, 60,000(typ.)/50,000 (min.)hrs
	Panel Surface	Anti-glare(Haze11%), hard coating(3H)
	Display Orientation	Portrait/Landscape enable
Graphic	Input	HDMI, DVI, VGA, YPbPr, AV, S-Video
	Output	VGA, AV
Audio	Input	Phone jack and RCA jack (L/R)
	Output	RCA Jack (L/R),external speaker connector EA12Wx 2
Power	Voltage	100 V ~ 240 V, 50 Hz / 60 Hz (built-in)
	Consumption	Max.: 250 Watts Power saving: < 1W
OSD	Basic	Image Setting
		Source/Volume control
		Language : English
	Diagnostic	Status report
		- DC voltage
		- Total turn on time
		- Internal temperature
	Advance	- Ambient light luminance
		ID setting for daisy chain
		Date/time
On/off scheduling		
Controls	Proofing of image retention	
	RS232	Support daisy chain
Environment	IR	Remote control
	Operating Temp.	0°C ~ 40°C
	Storage Temp.	5°C ~ 35°C
	Humidity	10% ~ 80% RH Non-Condensing
Safety & Ergonomics	Usage	18hours/7days
	Certification	FCC, BSMI, RoHS
Mechanical (w/o optional items)	Dimension	962.7x555.4x109.6 mm (LxHxD)
	Net Weight	23.6 kg
	Gross Weight	28.5 kg
	Bezel Width	13.8/13.8/13.8/13.8mm (T/B/L/R)
	Wall Mounting Hole	4 Holes (400 x 200mm)

Dimensions & Connectivity

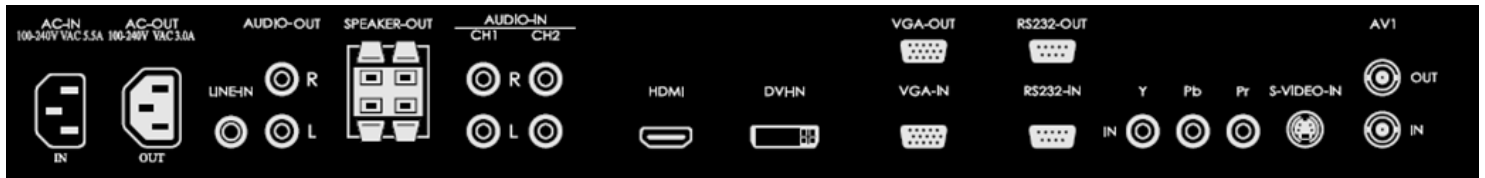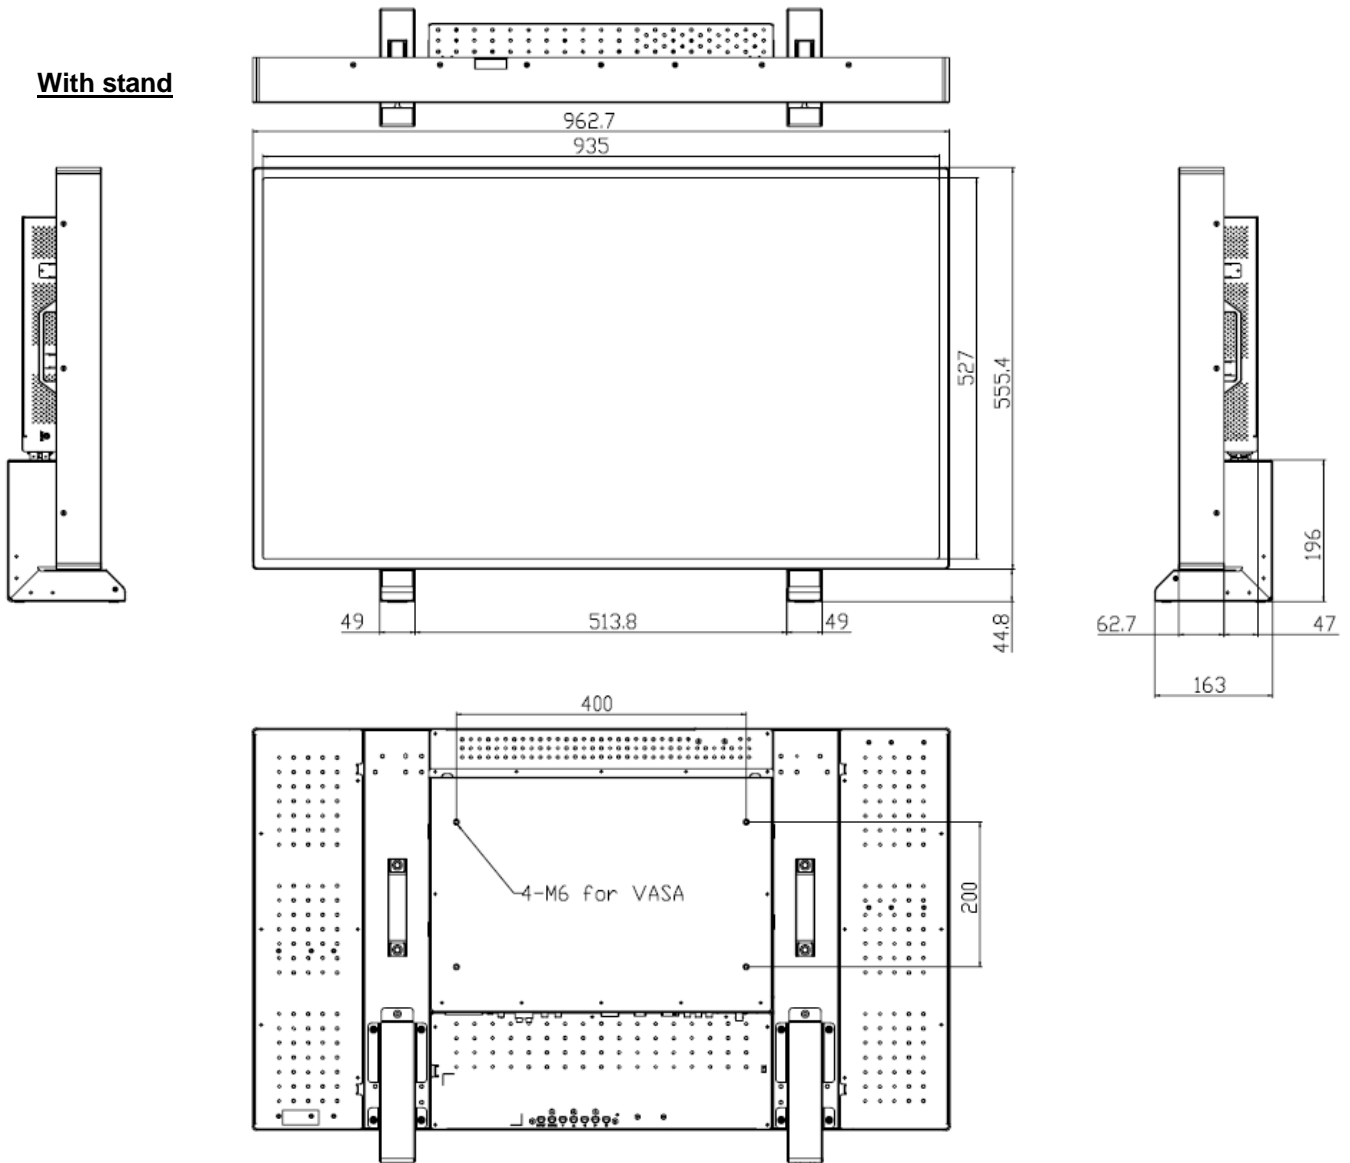

All Specification is subject to change without notice

Qisda Corporation
 157 Shan-Ying Road, Gueishan, Taoyuan 333, Taiwan
 Tel: 886 3 3595000 Fax: 886 3 3593385
www.QISDA.com