



Signage-friendly Design

- Slim bezel for tiled application
- All metal construction
- Industrial-grade, superior reliability
- Proofing of image retention
- Fan design
- Long life power board design
- VESA mounting compliance with carrying handles

PC-based Multi-panel Management

- Video Wall support
- Full function display controls
- Scheduling function, providing flexibility of display management
- Real-time diagnostic, detecting ambient light luminance, total turn-on time, and voltage & temperature

Accessory

- Remote control with batteries
- Quick start guide
- Power cable
- VGA cable


Optional Accessory

- Stand
- Internal speaker
- User manual CD

Specifications

Display	Size	64.5 inches color TFT LCD	
	Pixel Pitch	0.744 mm	
	Resolution	1920 x 1080 (pixels)	
	Contrast Ratio	4000:1 (typ)	
	Viewing Angles	178° horizontal, 178° vertical	
	Brightness	700 (typ) /550(min.) cd/m2	
	Light Source	Long life, 50,000hrs (min)	
	Panel Surface	AG, hard coating (3H)	
	Display Orientation	Portrait/Landscape enable	
Graphic	Input	HDMI, DVI, VGA, YPbPr, AV, S-Video	
	Output	VGA, AV	
Audio	Input	Phone Jack and RCA Jack (L/R)	
	Output	RCA jack (L/R),external speaker connector EA12Wx 2	
Power	Voltage	100 V ~ 240 V, 50 Hz / 60 Hz	
	Consumption	Max. < 520 Watts	
		Power saving: < 1W	
OSD	Basic	Image setting	
		Source/volume control	
		Language: English, Spanish, France	
	Diagnostic	Status report	
		- DC voltage	
		- Total turn on time	
		- Internal temperature	
	Advance	- Ambient light luminance	
		ID setting for daisy chain	
		Date/time	
On/off scheduling			
Controls	Proofing of image retention		
	RS232	Support daisy chain	
	IR	Remote control	
	Environment	Operating Temp.	0°C ~ 40°C
		Storage Temp.	5°C ~ 35°C
Humidity		10% ~ 80% RH Non-condensing	
Usage		18hrs/7days	
Safety & Ergonomics	Certification	RoHS	
Mechanical (w/o optional items)	Dimension	1500.0x875.6x 122.8 mm (LxHxD)	
	Net weight	50kg	
	Gross weight	63kg	
	Bezel width	32.8/32.8/32.8/32.8mm (T/B/L/R)	
	Wall mounting hole	8 Holes (400 x 400mm,200 x 200mm)	

Dimensions & Connectivity

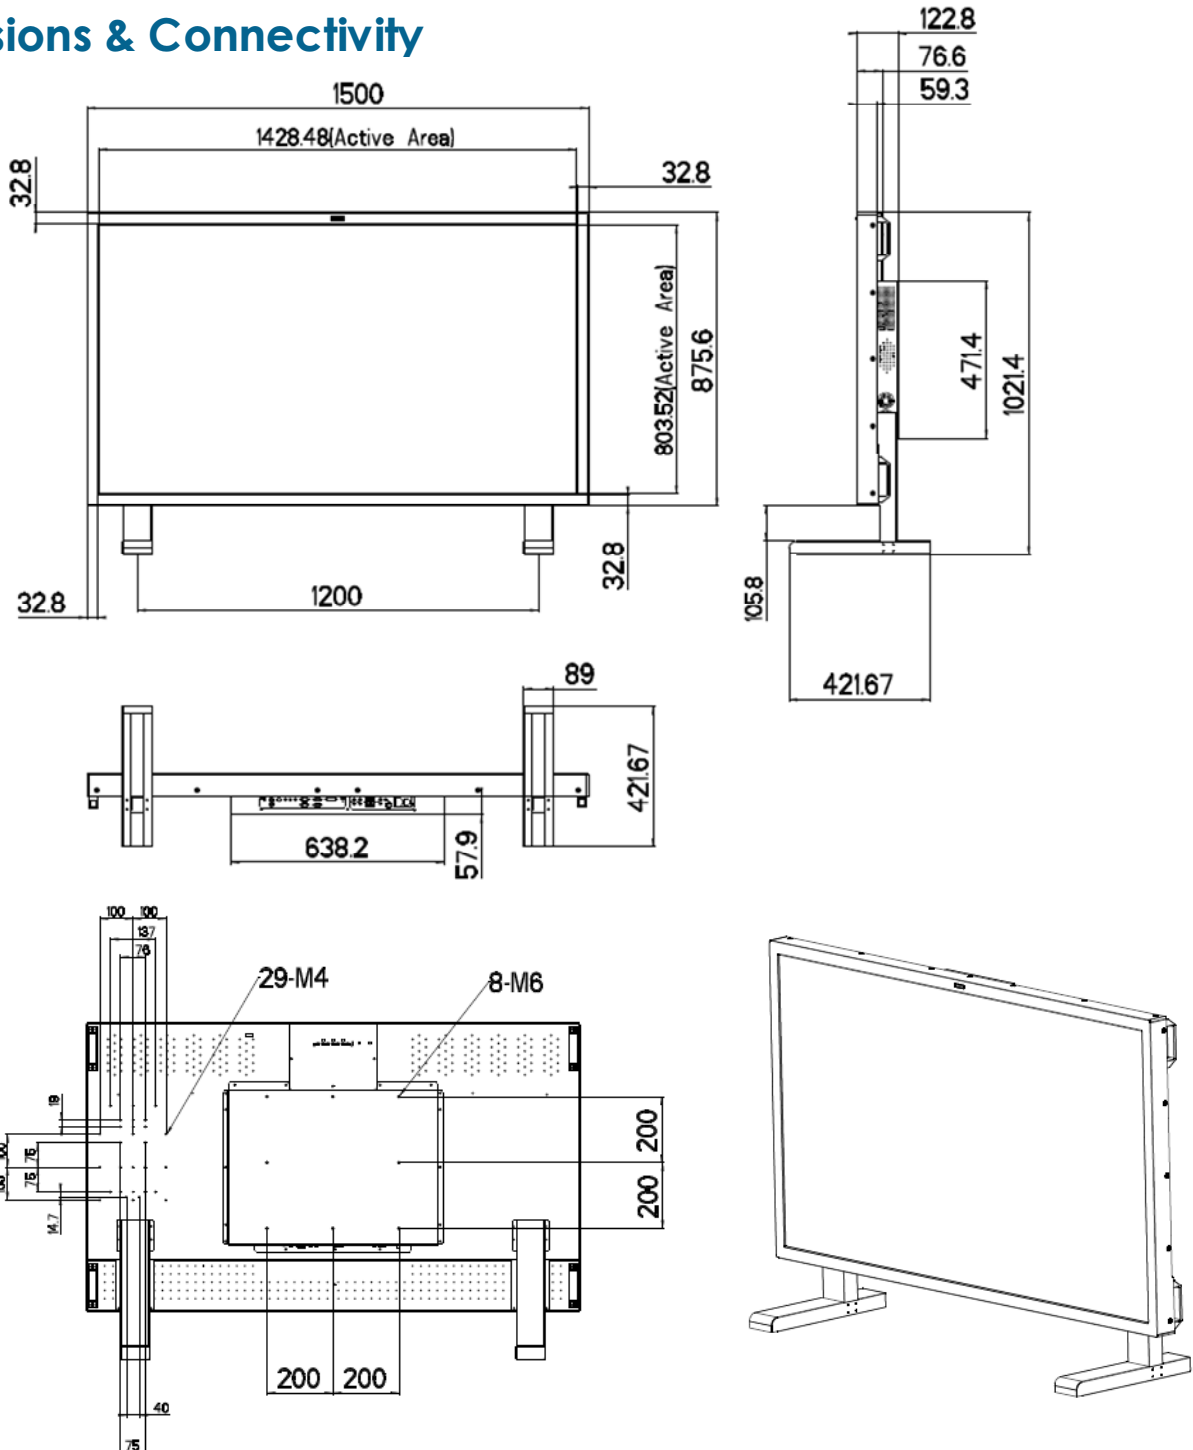

Qisda Corporation
 157 Shan-Ying Road, Gueishan, Taoyuan 333, Taiwan
 Tel: 886 3 3595000 Fax: 886 3 3593385
www.QISDA.com

All Specification is subject to change without notice