

## Specifications

Display	Size	64.53 inches color TFT LCD
	Pixel Pitch	0.744 mm
	Resolution	1920 x 1080 (pixels)
	Contrast Ratio	5000:1 (typ)
	Viewing Angles	178° horizontal, 178° vertical
	Response Time	8ms (typ)
	Brightness	500 (typ) /425(min.) cd/m2
	Light Source	Long life, 50,000hrs (min)
	Panel Surface	HCLR, hard coating (3H)
	Display Orientation	Landscape
Graphic	Input	HDMI, DVI, VGA, YPbPr, AV, S-Video
	Output	VGA, AV
Audio	Input	Phone Jack and RCA Jack (L/R)
	Output	RCA jack (L/R), external speaker connector EA12Wx 2
Power	Voltage	100 V ~ 240 V, 50 Hz / 60 Hz
	Consumption	Max. < 450Watts <b>TBD</b> Power saving: < 1W
OSD	Basic	Image setting
		Source/volume control
		Language: English
	Diagnostic	Status report
		- DC voltage
		- Total turn on time
		- Internal temperature
	Advance	- Ambient light luminance
		ID setting for daisy chain
		Date/time
Controls	On/off scheduling	
	Proofing of image retention	
	RS232	Support daisy chain
	IR	Remote control
Environment	Operating Temp.	0°C ~ 40°C
	Storage Temp.	5°C ~ 35°C
	Humidity	10% ~ 90% RH Non-condensing
	Usage	12hrs/7days
Safety & Ergonomics	Certification	RoHS
Mechanical (w/o optional items)	Dimension	1523.6x891.6x 124.8 mm (LxHxD)
	Net weight	53.8kg
	Gross weight	66.8kg
	Bezel width	42.3/42.3/42.3/42.3mm (T/B/L/R)
	Wall mounting hole	8 Holes (400 x 400mm, 200 x 200mm)

### Signage-friendly Design

- All metal construction
- Industrial-grade, superior reliability
- Proofing of image retention
- Fan design
- Long life power board design
- VESA mounting compliance with carrying handles

### PC-based Multi-panel Management

- Full function display controls
- Scheduling function, providing flexibility of display management
- Real-time diagnostic, detecting ambient light luminance, total turn-on time, and voltage & temperature



### Accessory

- Remote control with batteries
- Quick start guide
- Power cable
- VGA cable

### Optional Accessory

- Stand
- Internal speaker
- User manual CD

## Dimensions & Connectivity

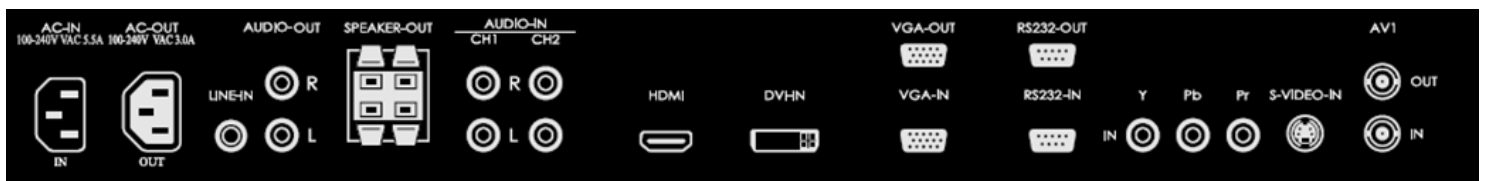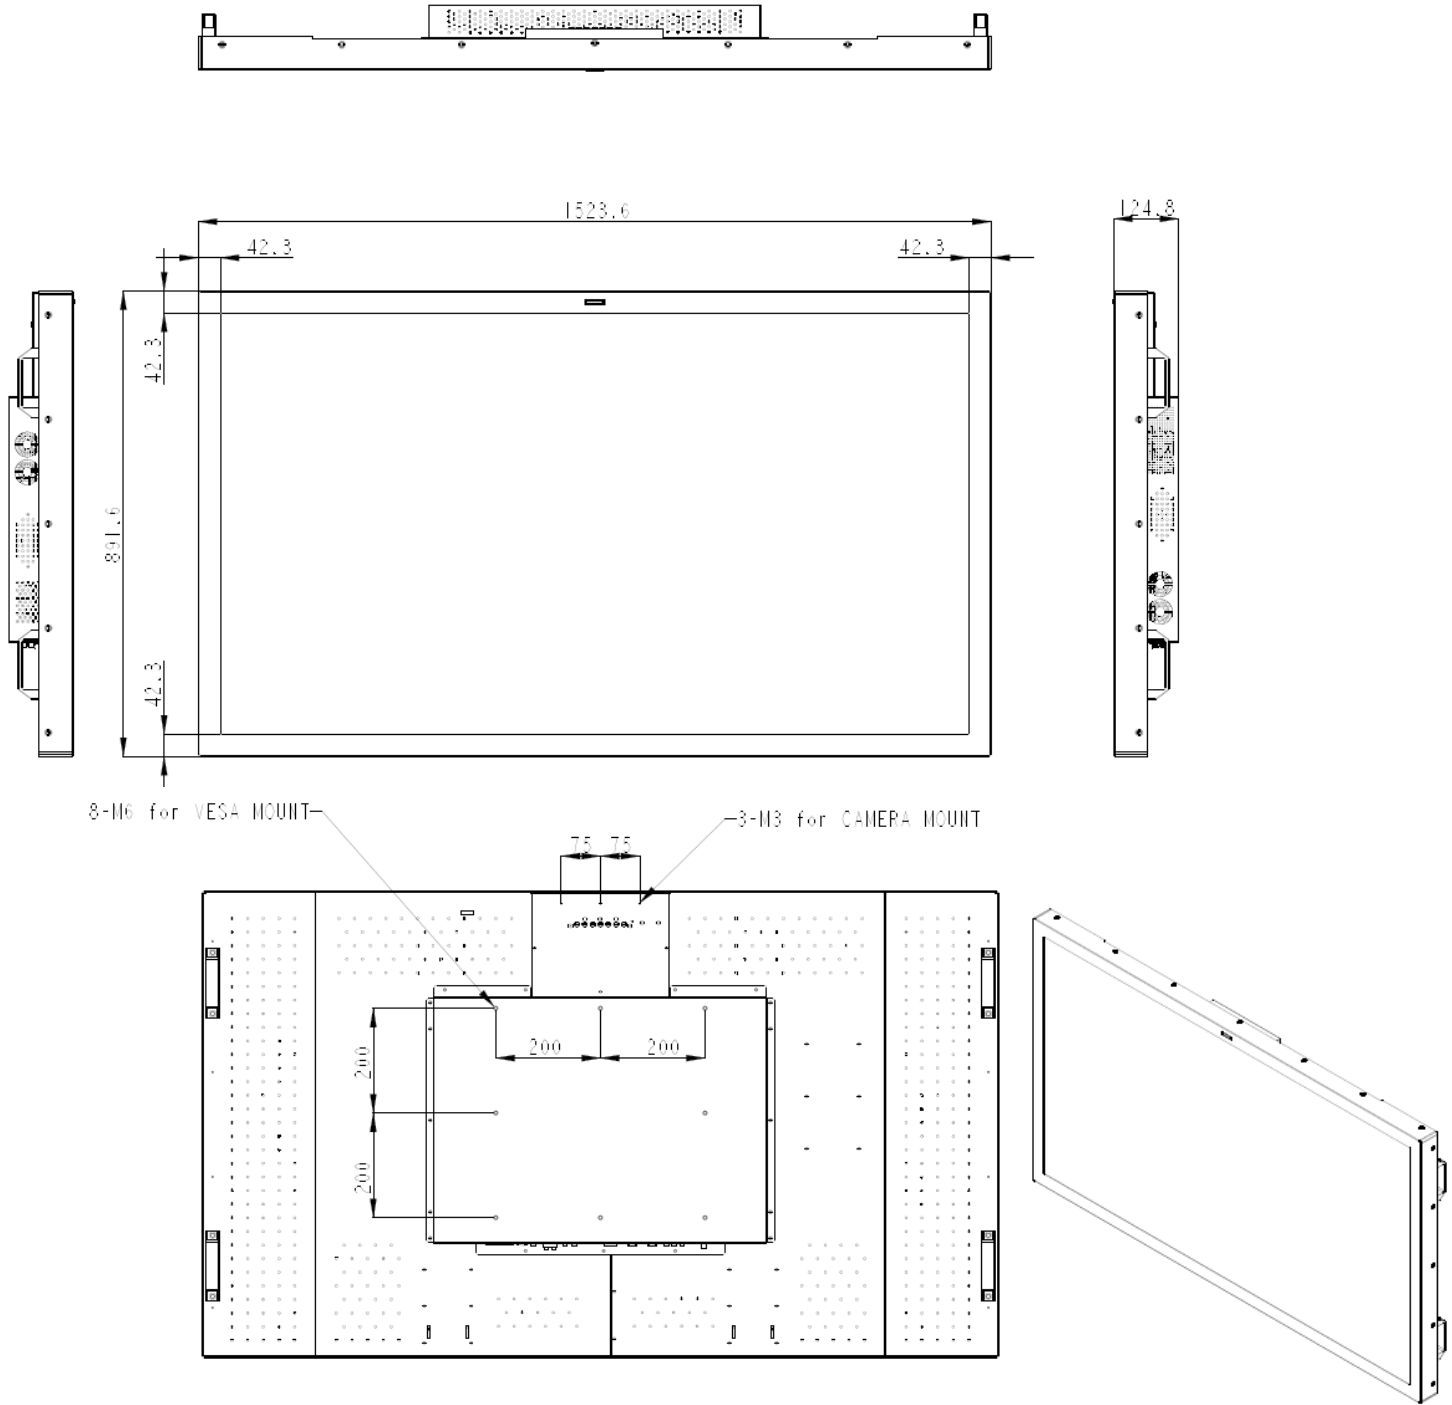

All Specification is subject to change without notice

Qisda Corporation  
 157 Shan-Ying Road, Gueishan, Taoyuan 333, Taiwan  
 Tel: 886 3 3595000 Fax: 886 3 3593385  
[www.QISDA.com](http://www.QISDA.com)